



# GALVEX 17.30

Multi-purpose degreaser for ultrasonic processes, for complete removal of polishing compounds.

## COMPATIBILITY:

- All metals except aluminium

## INGREDIENTS:

- Surfactants, solubilising agents
- No chelating agents or phosphates
- No VOC

## PHYSICAL AND CHEMICAL DATA:

- pH concentrated: 10.8
- pH (1%): 10.0
- Density: 1.002
- Surface tension: 30.7 mN/m

## INSTRUCTIONS FOR USE:

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.

- Concentration: 1 to 3%
- Temperature: 50 to 70°C (122 to 158°F)
- Time: 2 to 3 minutes

## BENEFITS:


- Emulsifies and dissolves grease
- Disperses contaminants
- Removes grease from items without leaving a residue on the surface
- Leaves a colourless film of surfactants on the surface that provides a temporary protection against corrosion
- Provides a hydrophobic surface

24/08/17

## STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.

## PROCESS EXAMPLE:

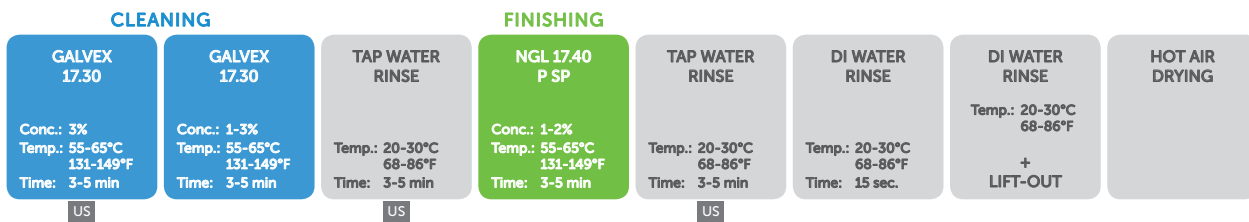

If you have any questions, please contact our Application Centre on: +41 22 365 46 66

