



# GALVEX 17.30 SUP

Multi-purpose degreaser for ultrasonic processes, for complete removal of polishing compounds.

## COMPATIBILITY:

- All metals except aluminium

## INGREDIENTS:

- Surfactants, solubilising agents, chelating agents
- Phosphate-free product
- No VOC

## PHYSICAL AND CHEMICAL DATA:

- pH concentrated: 10.8
- pH (1%): 10.4
- Density: 1.025
- Surface tension: 30.6 mN/m


## INSTRUCTIONS FOR USE:

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.


- Concentration: 1 to 5%
- Temperature: 50 to 70°C (122 to 158°F)
- Time: 3 to 5 minutes

## PROCESS EXAMPLES:

- Cleaning of plates and other watch components made of brass and nickel silver alloy  
Pollution: removal of oils and polishing compounds

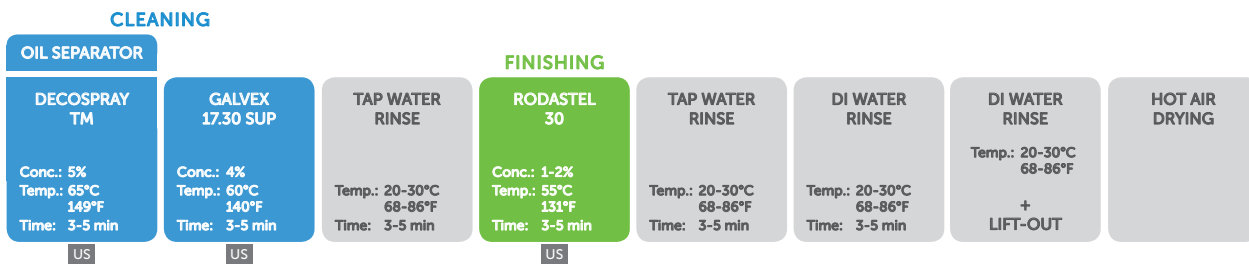

- Cleaning of sensitive steel parts (20 AP) - Pollution : removal of oils and polishing compounds

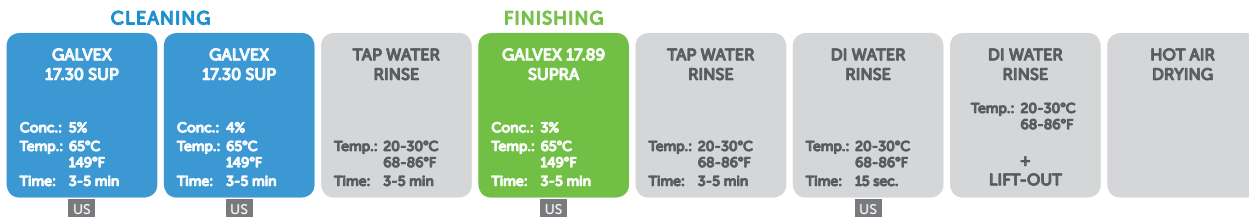

If you have any questions, please contact our Application Centre on: +41 22 365 46 66



## BENEFITS:

- Emulsifies and dissolves grease
- Disperses contaminants
- Removes grease from items without leaving a residue on the surface
- Leaves a colourless film of surfactants on the surface that provides a temporary protection against corrosion
- Hydrophobic finish
- Gives extra shine to copper alloys

31/08/17

## STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.