



GALVEX 18.08

Lightly alkaline liquid, antistatic effect, designed for degreasing and finishing of surfaces, prior to hot air drying.

COMPATIBILITY:

- All metals, including sensitive metals

INGREDIENTS:

- Surfactants, solubilising and chelating agents
- Phosphate free

PHYSICAL AND CHEMICAL DATA:


- pH (concentrated): 9.47
- Density: 1.088
- Surface tension: 21.8 mN/m

INSTRUCTIONS FOR USE:

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.

- Concentration: 0.1 to 3%
- Temperature: 40 to 60°C (104 à 140°F)
- Time: 3 to 5 minutes

PROCESS EXAMPLE:

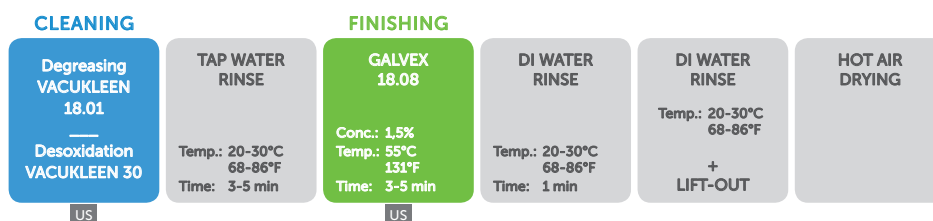

BENEFITS:

- Protection of sensitive parts
- No residue after rinsing, spot-free drying
- Excellent surface preparation prior to PVD / CVD
- Antistatic effect

22/11/17

STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

