



# HELIT SUPER

Lightly alkaline liquid to remove oils, polishing compounds and grinding oils, in ultrasonic processes.

## COMPATIBILITY:

- All metals
- Plastic

## INGREDIENTS:

- Surfactants, complexing agents
- Solubilising agents

## PHYSICAL AND CHEMICAL DATA:

- pH concentrated: 8.9
- pH (1%): 8.8
- Density: 1.041
- Surface tension: 29.7 mN/m

## INSTRUCTIONS FOR USE:


The optimum conditions for use are affected by the quality of the water used in the baths and the type and quantity of contaminants.

- Concentration: 2 to 5%
- Temperature: 40 to 75°C (104 to 167°F)
- Time: 2 to 4 minutes


Tip: prepare baths with hot water (40°C / 104°F) or with demin. water

## PROCESS EXAMPLES:

- Luxury goods cleaning (brass). Polishing compounds removal

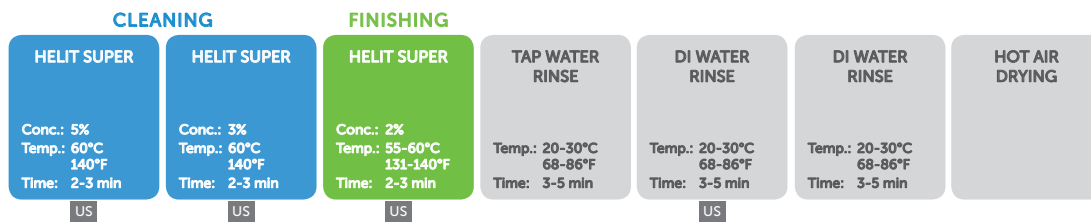

- Passivation of watchparts

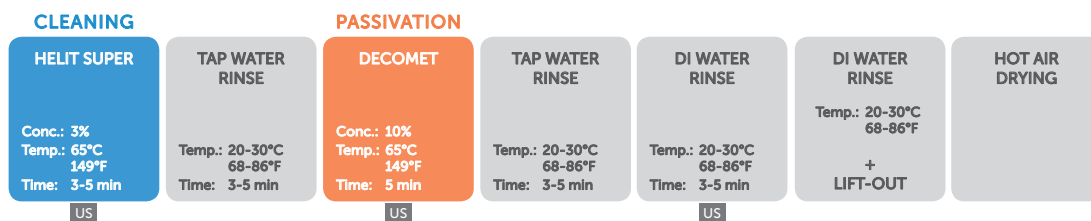

## BENEFITS:

- Perfect degreasing and superfinishing of surfaces
- Ensures a spotless, shiny finish
- Excellent emulsification and solubilisation of greasy substances
- Can be easily rinsed off and used as a finishing product

## STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.

16/01/18



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

