



LG 2

Rinsing solution for watch movements in after-sales service systems or in ultrasonic processes.

COMPATIBILITY:

- All metals

INGREDIENTS:

- Solvents


PHYSICAL AND CHEMICAL DATA:

- pH concentrated: n.m.
- Density: 0.950
- Flash point: 73°C
- Surface tension: 29.1 mN/m

INSTRUCTIONS FOR USE:

- Concentration: 100%
- Temperature: 20 to 30°C (68 to 86°F)
- Time: 2 to 10 minutes

PROCESS EXAMPLE:

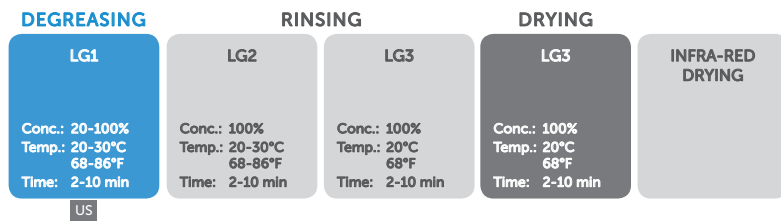

US

BENEFITS:

- Efficient rinsing on watch movements with or without ultrasonics
- Water residues removal
- Use with or without ultrasonics

17/01/18

STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

