



CERACLEAN SP

Liquid product used in ultrasonic processes to obtain a spot free finish on all surfaces, prior to hot air drying.

COMPATIBILITY:

- All metals

INGREDIENTS:

- Strong acid, surfactants
- Chelating agents, anti-corrosion agents

PHYSICAL AND CHEMICAL DATA:

- pH concentrated: 0.5
- pH (1%): 2.3
- Density: 1.202
- Surface tension: 32.7 mN/m


INSTRUCTIONS FOR USE:

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.

- Concentration: 3 to 10%
- Temperature : 45 to 60°C (113°F and 140°F)
- Time : 2 to 4 minutes

PROCESS EXAMPLE:

- Cleaning prior to PVD/CVD of brass/zamak/steel with galvanic layer. Removal of polishing compounds and finger prints.

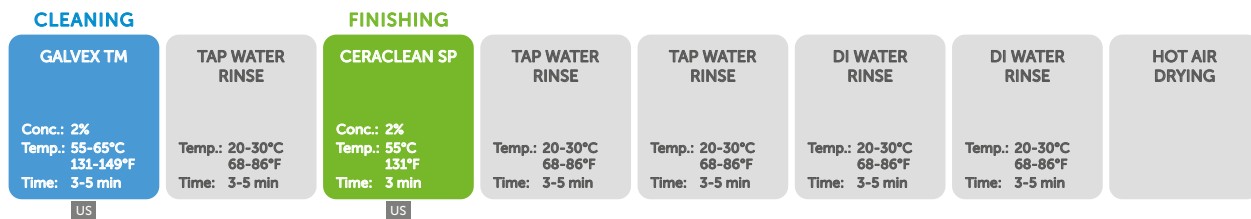

BENEFITS:

- Efficient for finishing prior to hot air drying
- Removal of all kinds of organic residues
- Long bath life
- Brightening effect

30/07/20

STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

