



# SCHUTZLACK NGL 2002 ROSE

Surface protection lacquer against shocks and scratches, during storage operations.

## COMPATIBILITY:

- All metals
- Mineral lenses
- Organic lenses excepted polycarbonate

## INGREDIENTS:

- Isopropanol, acetone
- Polymers, dye

## PHYSICAL AND CHEMICAL DATA:

- Aerosol 400 ml
- Not watersoluble
- Color: pink
- Density: 0,801 - 0,804
- %sec: 5,3 - 6,0
- Flash point: < 21°C (69,80°F)


## INSTRUCTIONS FOR USE:

- Spray the surface which needs protection from a distance 10-20 cm
- Leave the lacquer to dry for 5-10 min. depending on the amount sprayed
- After use: turn the container and press the valve until only gas comes out
- Container is under pressure
- Do not spray against a flame or any source of ignition
- Do not pierce or burn even after use
- Do not smoke

## PROCESSES EXAMPLES FOR ELIMINATION OF THE LACQUER:


- Schutzlack removal from stainless steel

### CLEANING

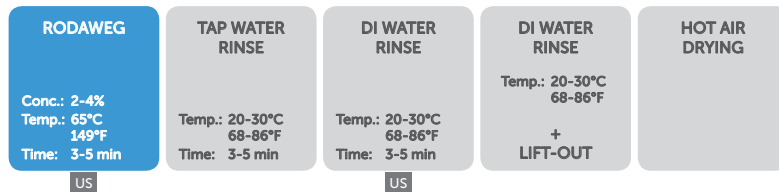

- Schutzlack removal from copper and sensitive steels

### CLEANING

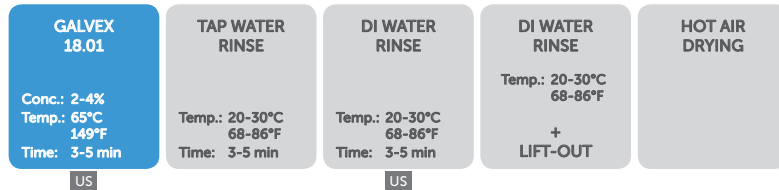

## BENEFITS:

- Spray application leaves a uniform protective layer and a fast drying time
- Protects against shocks and scratches
- Can be used as a varnish masking for polishing steps
- Removable with aqueous detergent (see processes below)

## STORAGE CONDITIONS:

- Protect from sunlight and do not expose to temperatures exceeding 50°C (122°F).  
Keep well away from all sources of ignition.
- The shelf life of the product is 24 months from the date of manufacture, under the appropriate storage conditions.

18/09/18

