



VACUKLEEN AC

Slightly alkaline liquid product, used in ultrasonic processes, for the complete and rapid removal of polishing compounds.

COMPATIBILITY:

- All metals

INGREDIENTS:

- Surfactants, chelating agents
- Anti-corrosion agents

PHYSICAL AND CHEMICAL DATA:

- pH concentrated: 10.4
- pH (1%): 9.9
- Density: 1.043
- Surface tension: 31.1 mN/m


INSTRUCTIONS FOR USE:

The optimum conditions for use are affected by the quality of the water used in the baths and the type and quantity of contaminants.


- Concentration: 1 to 2%
- Temperature: 50 to 70°C (122 to 158°F)
- Time: 2 to 3 minutes

PROCESS EXAMPLES:

- Cleaning hard metal cutting bars

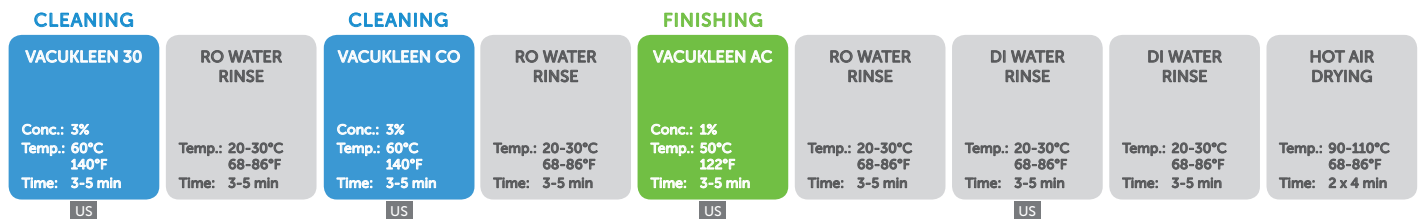

- Cleaning cutting tools made out of carbide and sensitive steel

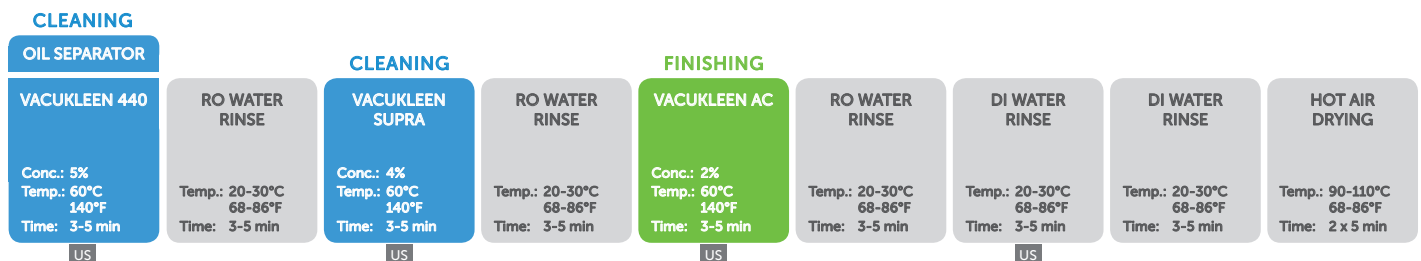

BENEFITS:

- No VOC, nor phosphates
- Brightening effect on copper alloys, does not attack cobalt
- Temporary anticorrosion protection of parts
- Complete and rapid removal of residues of polishing compounds
- Gives slight water repellent properties to parts surface (reduces drying time)
- Spotless finish, no oxidation, prior to hot air drying

20/11/18

STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

