



KORROSTOP 5000

Anticorrosion additive for the protection of sensitive steel following an aqueous cleaning process.

COMPATIBILITY:

- All metals

COMPONENTS:

- Anticorrosive agents

PHYSICO-CHEMICAL DATA:

- pH concentrated: 12.3
- pH (1%): 11.1
- Density: 0.968
- Surface tension: 38.5 mN/m


INSTRUCTIONS FOR USE:

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.


- Concentration: 0.02 to 0.1%
- Temperature: 20 to 30°C (68 to 86°F)
- Time: 2 to 3 minutes

PROCESS EXAMPLES:

- Cleaning of steel parts before DLC deposit

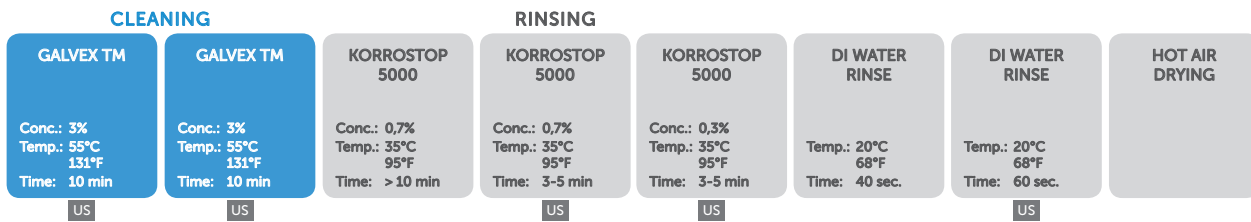

- Cleaning of circular saws

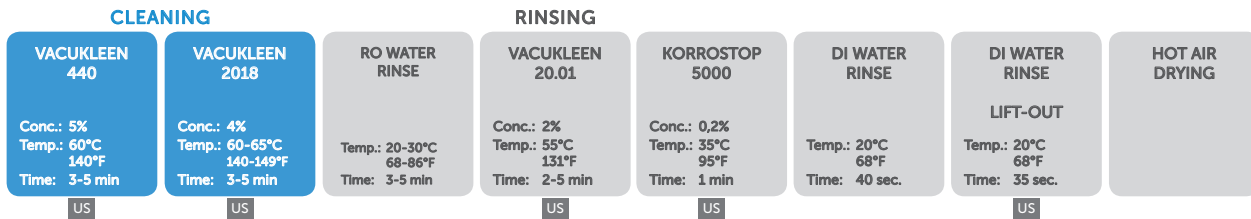

BENEFITS:

- Exceptional protection against corrosion
- Used as additive in the final rinsing bath with demineralized water
- Does not contain any salt (nitrite, etc...)
- Economical due to dilution between 0.02 and 0.1%

STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.

26/11/18



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

