



# DECOFLOC 220

Coagulation agent for the treatment of industrial wastewater prior to disposal into the sewerage system.

## PRODUCT TYPE:

- Coagulation agent (aluminium derivative) in aqueous solution

## ASPECT :

- Colourless liquid
- Water solubility: 100%

## PHYSICOCHEMICAL DATA:

- pH concentrated: n.m.
- pH (1%): 4.0
- Density: 1.2


## INSTRUCTIONS FOR USE:

- Dosage: 1-5 L/m<sup>3</sup> (depends on degree of impurity))

## STORAGE CONDITIONS:

- Storage temperature between 5°C and 35°C (41°F and 95°F) in a dry place.
- Packaging in a can of 200 L and barrel of 1000 L.

## PROCESS EXAMPLE:

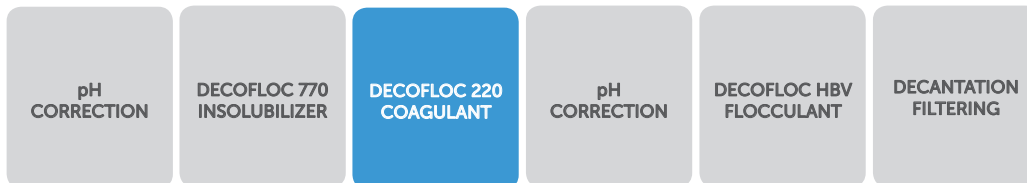


## BENEFITS:

- Conformity of wastewater with legal requirements on heavy metals concentrations
- Used for the treatment of alkaline degreasing baths and polishing effluents

23/10/18

## OPERATING PRINCIPLE:

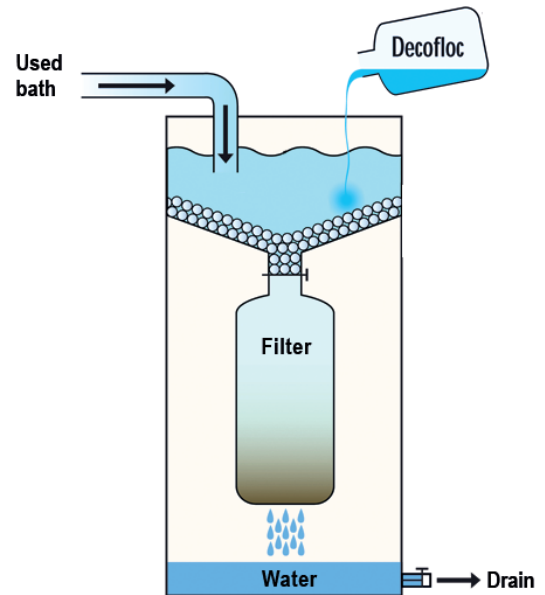

If you have any questions, please contact our Application Centre on: +41 22 365 46 66

