



DECOFLOC OPTIC

Flocculation agent for the treatment of industrial wastewater prior to disposal into the sewerage system.

PRODUCT TYPE:

- Flocculation agent (organic polymer) in aqueous solution

ASPECT:

- White solid
- Water solubility: 100%

PHYSICOCHEMICAL DATA:

- pH concentrated: n.m.
- pH (1%): n.m.
- Density: n.m.


INSTRUCTIONS FOR USE:

- Dosage: 2 - 6 g/m³
- Used as flocculation agent for suspended matter in the form of solid sludge in addition to the coagulant DECOFLOC 110

STORAGE CONDITIONS:

- Storage temperature between 5°C and 35°C (41°F and 95°F) in a dry place.
- Packaging in a can of 1KG, 5KG, 10KG, 25KG.

PROCESS EXAMPLE:

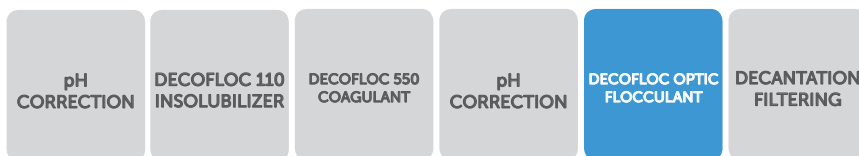

If you have any questions, please contact our Application Centre on: +41 22 365 46 66



BENEFITS:

- Conformity of wastewater with legal requirements on heavy metals concentrations
- Product ready to use, requires no flocculant preparer

22/10/18

OPERATING PRINCIPLE:

