



KORROSTOP 6500

Innovative formulation for the protection of steel that becomes sensitive after being cleaned in an aqueous medium, for all types of shipping (including maritime).

COMPATIBILITY:

- Ferrous and copper alloys

INGREDIENTS:

- Surfactants, solvating agents
- This product does not contain complexing agents or phosphates

PHYSICAL AND CHEMICAL DATA:

- pH concentrated: 9.3
- Density: 0.909
- Surface tension: 38.5 mN/m


INSTRUCTIONS FOR USE:

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.

- Concentration: 3 to 10%
- Temperature: 20 to 60°C (68 to 140°F)
- Time: 1 to 3 minutes


PROCESS EXAMPLES:

- Application :

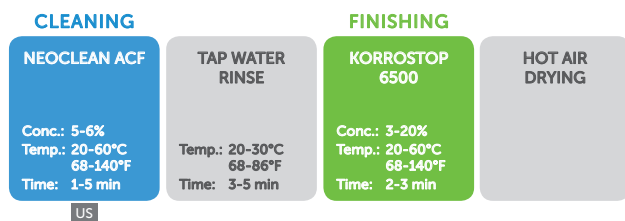

US

- Removal:

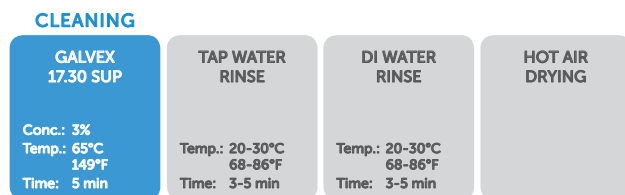

US

BENEFITS:

- Easily removed using alkaline washing medium
- Economical due to dilution between 3 and 10%
- Exceptional anti-corrosion power: creating a thin oil layer (a few µm)
- Allows for long-term storage of items sensitive to oxidation during shipping
- Replaces solvents base dewatering
- Applied by dipping or spraying
- Not flammable

03/05/19

STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS

Chemin de la Vuarpillière 7 // CH-1260 NYON // SWITZERLAND
+41 22 365 46 66 // contact@ngl-group.com // www.ngl-group.com



 **SWISS QUALITY**

