



# DECOSPRAY SP A

Slightly alkaline and non foaming liquid for spray cleaning of machined parts.

## COMPATIBILITY:

- All metals

## COMPONENTS:

- Surfactants, phosphates
- Chelating agents

## PHYSICO-CHEMICAL DATA:

- pH concentrated: 11.2
- pH (1%) : 10.8
- Density: 1.302
- Surface tension of concentrated chemical: 35.9 mN/m


## INSTRUCTIONS FOR USE:

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.


- Concentration: 1 to 5%
- Temperature: 40 to 70°C
- Time: 2 to 3 minutes

## PROCESS EXAMPLES:

- Cleaning in soaking process of machined parts with blind holes:

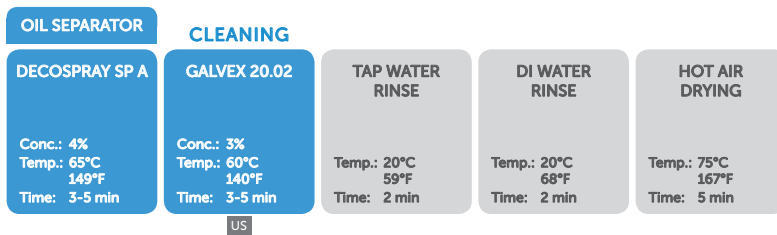

- Steel cleaning in spray process:

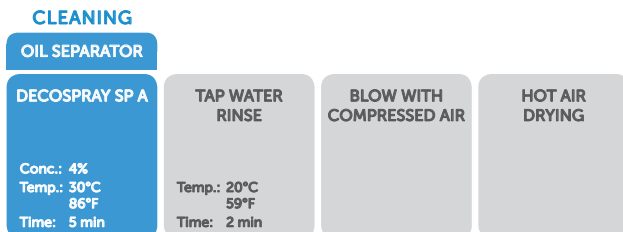

## BENEFITS:

- Does not oxidize metals, including aluminium
- Separates oils (the installation has to be equipped with an oil separator).
- Temporary protection against oxidation

16/12/19

## STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

