



DECOSPRAY 18.08

Slightly alkaline degreasing product, low foaming, for the finishing of surfaces by spraying prior to hot air drying.

COMPATIBILITY:

- All metals
- Metals sensitive to corrosion

INGREDIENTS:

- Tensioactives, solubilising and chelating agents
- Phosphate free

DONNÉES PHYSICO-CHIMIQUES :

- pH concentrated: 9.6
- pH (1%): 9.3
- Density: 1.078
- Surface tension: 21.4 mN/m


INSTRUCTIONS FOR USE:

The optimum conditions for use depend on the quality of the water used in the baths and the type and quantity of contaminants.


- Concentration: 0.1 to 3%
- Temperature: 40 to 60°C (104 to 140°F)
- Time: 3 to 5 minutes

PROCESS EXAMPLES:

- US system single tank:

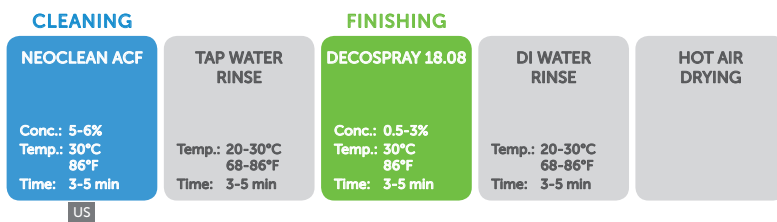

- Spraying system:

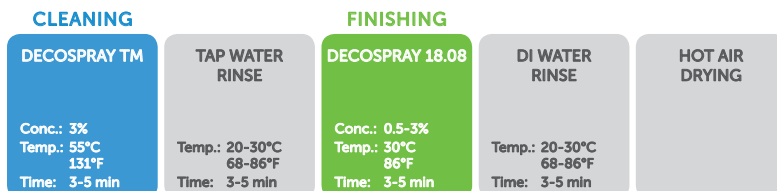

BENEFITS:

- Protection of sensitive parts
- Leaves no residue after rinsing and ensures spot-free drying
- Excellent surface preparation prior to PVD / CVD coating
- Antistatic effect

09/06/20

STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

